


Ø 2.0 16x16 Dot Matrix Dual Color LED Display

1.57" (40.10mm) matrix height


● ABSOLUTE MAXIMUM RATINGS : (T_a=25°C)

PARAMETER	GREEN	SR RED		UNIT
Power Dissipation Per Seg	65	72		mW
Peak Forward Current Per Seg (1/10 Duty Cycle, 0.1ms Pulse Width)	100	125		mA
Continuous Forward Current Per Seg	25	30		mA
Derating Linear From 25°C Per Seg	0.33	0.42		mA/°C
Reverse Voltage Per Seg	5	5		v
Operating Tem Range	-35°C to + 85°C			
Storage Tem Range	-35°C to + 85°C			
Solder Tem 1/16 inch Below Seating Plane at 260°C for 3 seconds				

● PACKAGE DIMENSIONS

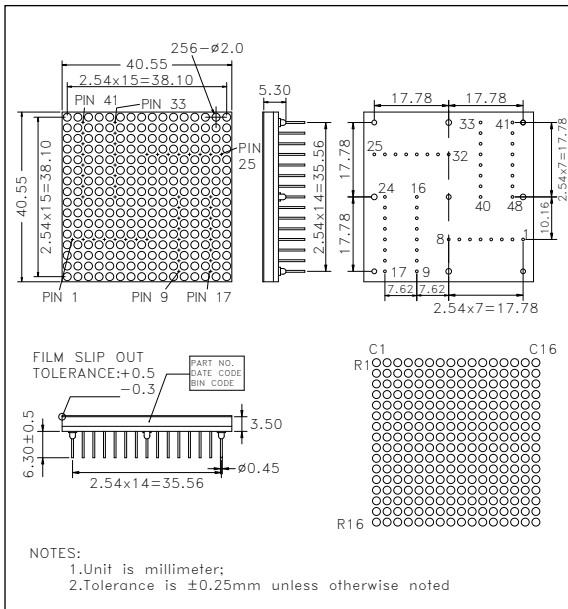

● INTERNAL CIRCUIT DIAGRAM

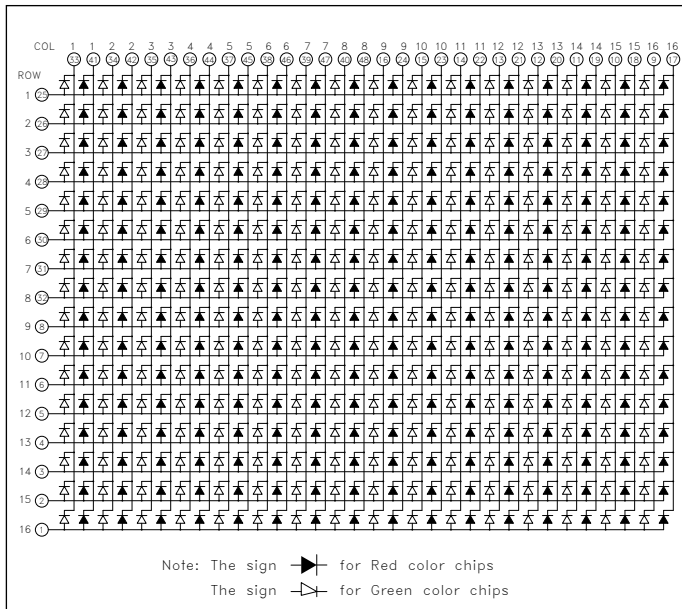

● ELECTRICAL/OPTICAL CHARACTERISTICS

PART NO.	COLOR	λ_p/λ_d (nm)	Half-Spectral Width($\Delta\lambda$)	Description	AVERAGE LUMINOUS INTENSITY			FORWARD VOLTAGE	
					Min.(mcd)	Typ.(mcd)	@ I _F (mA)	Typ.(V)	@ I _F (mA)
M157FF0SUTW	GREEN	568/573	30	CC	0.8	1.8	I _p =80mA 1/16 Duty	2.1	20
	SR RED	660/643	20		0.9	2.2		1.8	20

Notes : These components are also available in :

- Low Current
- AllnGaP high intensity red,orange,yellow green,amber