




# LED DOWNLIGHT **22W 8"**

## Features :

- LED life is longer than 20,000 hours.
- 60~70% more energy-saving over fluorescent lamps.
- 60~70% more energy-saving over traditional lamps.
- Universal Input Voltage (wide voltage range) AC 100V ~ 240V.
- Unique thermal management.
- Prompt start-up time, no flickering.
- Low heat production, no ultraviolet radiation.
- Green and environmentally friendly product.

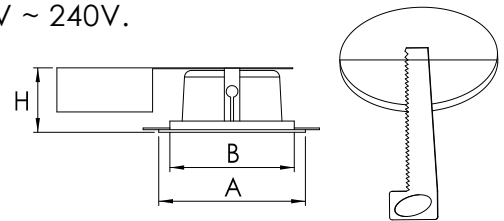

Model ( inch )	Size	Cut - out	
	A (mm)	B (mm)	H (mm)
8	Ø228	Ø205	140

SPECIFICATION		
Model	DL81202265BA	DL81202235BA
Voltage Range	90 ~ 240V AC	90 ~ 240V AC
Frequency Range	50/60 Hz ( 47~63 H )	50/60 Hz ( 47~63 H )
Power Factor	> 0.85	> 0.85
Power Consumption	22W	22W
Color Space	Cool White	Warm White
Color Temperature	6500K (±10 %)	3500K (±10 %)
Lumen Output (lm) (Min)	> 1400 lm	> 1260 lm
Color Rendering Index	> 75	> 80
LED Lifetime (Maintains at least 70% of initial lumen output)	> 20,000 hrs	> 20,000 hrs
Beam Angle	120 degrees	120 degrees
Fixture Material	Glass / Steel / Aluminum	Glass / Steel / Aluminum
Operating Temperature	-20 ~ +40 °C	-20 ~ +40 °C
Operating Humidity	20 ~ 90 % RH non-condensing	20 ~ 90 % RH non-condensing
Storage Temperature Range	-30 °C ~ +80 °C 10 ~ 90 % RH	-30 °C ~ +80 °C 10 ~ 90 % RH

## **TBK** T-BESTEK CO.,LTD.

Headquarters (Taiwan) : 9F, No. 786-1, Chung Cheng Rd., Chung-Ho Dist., New Taipei City, Taiwan R.O.C  
 TEL : +886-2-32340009 FAX : +886-2-32340002  
 Factory (China) : Hekeng Industrial Zone Dalang Street , Baoan District , Shenzhen City ,Guangdong P.R. China  
 TEL : +86-755-33862288 FAX : +86-755-33862299

<http://www.tbkopto.com>